



Fire Steel Doors

Model: FRN, 4 Hr Fire Rating BS 476: Part 20: 1987 & Part 22: 1987

DSIBritish Standards
BS 476:Part 20:1987
BS 476:Part 22:1987

Airborne Sound Transmission Loss (TL), STC = 39
measured by Acoustics Laboratory, Chulalongkorn University

Fire Steel Doors

Model: CSD, 2 Hr Fire Rating BS 476: Part 20: 1987 & Part 22: 1987

BS 476: Part 20: 1987 BS 476: Part 22: 1987

Non-Fire Steel Doors

Model: SFX, SFD, NFD

TIS 1288-2538












Styles and Colors




















Door Hardware

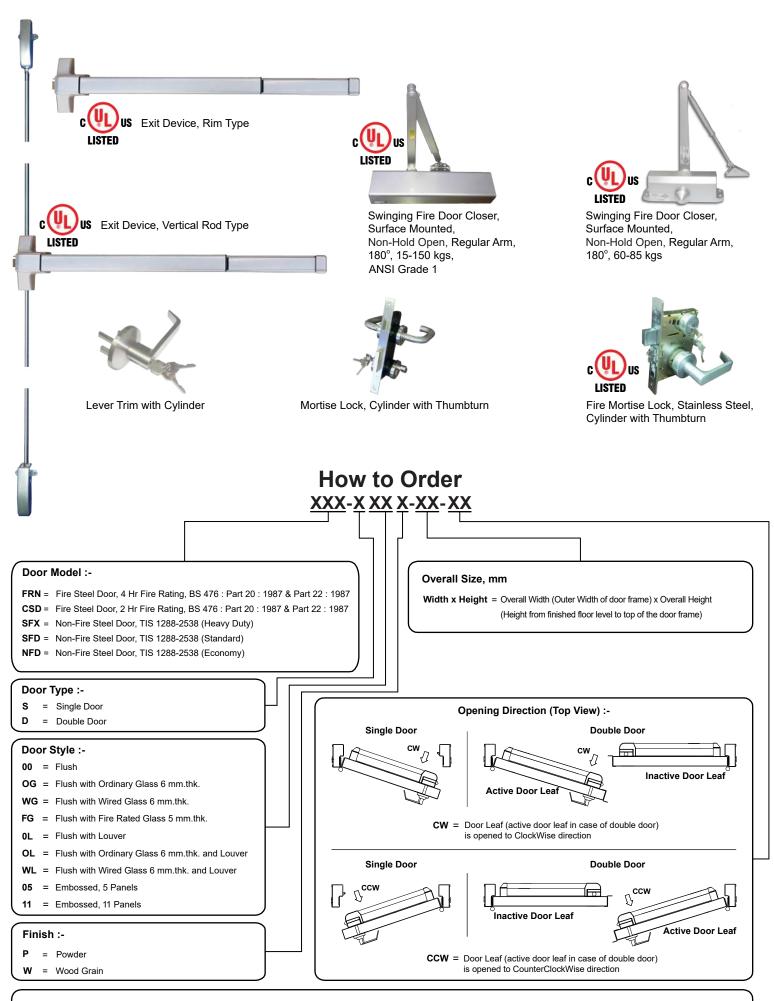


Example : FRN-SFGP-1000x2100-CCW = Fire Steel Door, Single Door, Flush with Fire Rated Glass 5 mm.thk., Powder Finish, Overall Width 1000 mm x Overall Height 2100 mm Door Leaf is opened to CounterClockWise direction.









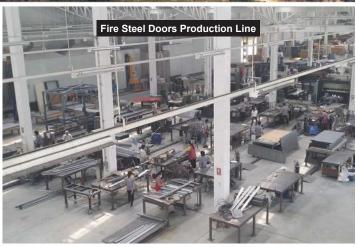

Our products have been distributed to many countries worldwide: Finland NORTH ASIA NORTH ANIERICA USA AFRICA SOUTH AMERICA AMERICA AMERICA AUSTRALIA AUSTRALIA AUSTRALIA AUSTRALIA AUSTRALIA AUSTRALIA

